

Fractional Hold Circuits for the Design of Positive Realness Discrete Transfer Functions

M. de la Sen and A. Bilbao-Guillerna
 Instituto de Investigación y Desarrollo de Procesos
 Facultad de Ciencias, Universidad del País Vasco
 Leioa (Bizkaia). Aptdo. 644 de Bilbao. 48080-Bilbao (SPAIN)

Abstract— The appropriate use of fractional order holds (β -FROH) of correcting gains $\beta \in [-1, 1]$ as an alternative to the classical zero and first order -holds (respectively, ZOH, FOH) is discussed related to the positive realness of the associate discrete transfer functions obtained from a given continuous transfer function. It is proved that the minimum direct input-output gain (i.e. the quotient of the leading coefficients of the numerator and denominator of the transfer function) needed for discrete positive realness may be reduced by the choice of β compared to that required for discretization via a ZOH .

I. INTRODUCTION

A description about Fractional Order-Holds and introductory background on positive realness are given. The realizable continuous transfer function $p(s) = q(s)/n(s) = p'(s) + d$ of numerator and denominator polynomials $q(s)$ and $n(s)$ with $p'(s)$ being strictly proper, is positive real ($p \in \{PR\}$) if $p(s) \in R$ (the set of real numbers), $\forall s \in R$ and $Re(p(s)) \geq 0$ for $\sigma = Re(s) \geq 0$, $\forall s \in C$ [1], [2] (the set of complex numbers). Positive realness is a very common property of transfer functions arising in electrical circuitry and can be synthesized as driven point admittances. A necessary condition for a realizable continuous transfer function to be positive real is that it is stable with zero or unity relative degree and with eventually critically stable poles being simple with nonnegative residuals. Positive realness also implies stability of zeros [2], [3] and it is a key feature in achieving asymptotic hyperstability via feedback for all nonlinear/time-varying device satisfying a Popov's -type inequality [4]. The scalar d is the direct input/output gain, with $d=0$ if and only if $p(s) = p'(s)$ is strictly proper. Consider the class of β -FROH [including Zero-Order Holds- ZOH ($\beta = 0$) and First-Order Holds FOH ($\beta = 1$)] of transfer function $h_\beta(s)$ leading to the β -dependent discrete transfer functions:

$$\begin{aligned} g_\beta(z) &= Z[h_\beta(s)p(s)] \\ &= g_\beta(z) + d_\beta \\ h_\beta(s) &= \left[1 - \beta + \beta \frac{1+sT}{T} h_o(s) \right] h_o(s) \end{aligned} \quad (1)$$

where $Z[\cdot]$ stands for the z-transform. The transfer function h_β is obtained directly [5], [4] since the output of the hold device being injected as input to the continuous transfer function is

$$u(t) = u_k + \frac{\beta}{T} (u_k - u_{k-1})(t - kT) \quad (2)$$

$\forall t \in [kT, (k+1)T]$ with $u_k = u(kT)$ any sample-indicator integer $k \geq 0$ with T being the sampling period. Note that $h_\beta(s)$ may be directly synthesized with two ZOH's and a simple linear network. It has been proved [2] that $g_o(z)$ is discrete positive real $g_o \in \{PR_d\}$ if $p(s)$ is stable (or, in particular, positive real) and biproper (i.e. of zero relative degree) with and a sufficiently large associated direct input-output gain $d_o = d \geq d_{min} > 0$. This implies that if $d = 0$ (i.e. $p(s) = p'(s)$ is strictly proper) then $g_o \notin \{PR_d\}$ even if $p \in \{PR\}$ with unity relative degree. Positive realness under discretization via β -FROH is now discussed by first defining positive realness with prescribed margins.

II. PROBLEM STATEMENT

Definition 1: It is said that $g_{beta} \in \{PR_d(\epsilon)\}$, some $\epsilon \geq 0$, if $Reg_\beta(z) \geq \epsilon, \forall z \in UC := \{z \in C : |z| = 1\}$. Note that $\{PR_d(0)\} \equiv \{PR_d\}$ and $g_\beta \in \{PR_d(\epsilon)\} \Rightarrow g_{\beta \in \{PR_d(\epsilon')\}}, \forall \epsilon \in [0, \epsilon)$ and $g_\beta \in \{SPR_d\}$; i.e. $g_\beta(z)$ is strictly positive real (since $\min_{z \in UC} (Reg_\beta(z)) \geq 0$).

Positive realness of $g_\beta(z)$: Direct simple calculations allow rewriting the first equation in (1) as,

$$g_\beta(z) = (1 - \beta z^{-1}) \left(g_o'(z) + d_\beta \right) + \beta T^{-1} z^{-1} (z-1) g_{o1}(z) \quad (3)$$

if $p(s) = p'(s) + d_\beta$ with $g_{o1}(z) = (1 - z^{-1})Z(s^{-2}p(s))$ what implies $g_o(z) = (1 - \beta z^{-1})(g_o'(z) + d_o)$. Simple calculations with (3) lead to,

$$\begin{aligned} g_\beta(z) &= (1 + \beta \tilde{g}(z)) \left(g_o'(z) + d_\beta \right) \\ \tilde{g}(z) &= \frac{1}{z} \left[\frac{1}{T} \frac{q_{o1}(z)}{q_o(z)} - 1 \right] \end{aligned} \quad (4)$$

since $g_{o1}(z)/g_o(z) = q_{o1}(z)/((z-1)q_o(z))$ with $q_{o1}(z)$ and $q_o(z)$ being the respective numerator polynomials of $g_{o1}(z)$ and $g_o(z)$ since their respective denominator polynomials $n_{o1}(z)$ and $n_o(z)$ satisfy the constraint $n_{o1}(z) = (z-1)n_o(z)$ from direct calculations involving the Z-transforms.

Since $p'(s)$ is strictly proper then $g_\beta(z) = Z[h_\beta(s)p(s)]$ is strictly proper of unity relative degree and order $\deg(n(s))$ if $\beta = 0$ and $(1 + \deg(n(s)))$ if $\beta \neq 0$.

Let real constants $m_i, m_s \geq m_i; \tilde{m}_i, \tilde{m}_s \geq \tilde{m}_i$ be such that,

$$\begin{aligned} \operatorname{Re}\{\tilde{g}(z)\} &\in [\tilde{m}_i, \tilde{m}_s] \\ \operatorname{Re}\{\tilde{g}(z)g_o(z)\} &\in [m_i, m_s]; \forall z \in UC \end{aligned} \quad (5)$$

Direct calculations using the worst lower-bound minimum bound for $\operatorname{Re}\{g_\beta(z)\}$ from (4) via (5) lead to

$$\begin{aligned} \operatorname{Reg}_{\beta(\geq 0)}(z) &\geq \varepsilon_o + \Delta d_\beta + \beta [m_i + (d_o + \varepsilon_o + \Delta d_\beta) \tilde{m}_i] \\ \operatorname{Reg}_{\beta(< 0)}(z) &\geq \varepsilon_o + \Delta d_\beta - |\beta| [m_s + (d_o + \varepsilon_o + \Delta d_\beta) \tilde{m}_s] \end{aligned} \quad (6)$$

which hold respectively, for $\beta \geq 0$ and for $\beta < 0$. The technical subsequent assumption is then used.

Assumption

$g_o \in \{PR_d(\varepsilon)\} (\Rightarrow g_o \in \{PR_d\})$ and $d_\beta \geq (d_o - \varepsilon_o)$ for some real $\varepsilon_o \geq 0$, all β -FROH. Now, define auxiliary real constants \tilde{m}_l from m_l , \tilde{m}_l from (5) as $\tilde{m}_l := m_l + (d_o + \varepsilon_o) \tilde{m}_l (l = i, s)$.

From this assumption and the constraint in (6), the following result holds.

Theorem 1: (Discrete positive realness via design of β): If the prior assumption holds then $g_\beta \in \{PR_d(\varepsilon)\}$ with $\operatorname{Reg}_\beta(z) \geq \varepsilon$ for some sufficiently small $\varepsilon \geq 0$ and

some β -FROH, $\beta \in [\beta_{min}, \beta_{max}] \subseteq [-1, 1]$ if some of the subsequent items hold:

- 1) $\left| \frac{\varepsilon - \varepsilon_o - \Delta d_\beta}{\tilde{m}_i} \right| \leq \beta \leq 1$
provided that $\varepsilon - \varepsilon_o \geq \Delta d_\beta \geq \max\left(-\varepsilon_o, -\frac{\tilde{m}_i}{\tilde{m}_i}\right)$ if $\tilde{m}_i \neq 0$ or $\varepsilon - \varepsilon_o \geq \Delta d_\beta \geq -\varepsilon_o$ if $\tilde{m}_i > 0$ and $\tilde{m}_i \neq 0$.
- 2) $0 \leq \beta \leq \max\left(\left| \frac{\varepsilon - \varepsilon_o - \Delta d_\beta}{\tilde{m}_i} \right|, 1\right)$
provided that $-\frac{\tilde{m}_i}{\tilde{m}_i} > \Delta d_\beta \geq \varepsilon - \varepsilon_o$ if $\tilde{m}_i \neq 0$ or $\Delta d_\beta \geq \varepsilon - \varepsilon_o$ if $\tilde{m}_i < 0$ and $\tilde{m}_i = 0$.
- 3) $\beta < 0, |\beta| \max\left(\left| \frac{\varepsilon + \Delta d_\beta - \varepsilon_o}{\tilde{m}_s} \right|, 1\right)$
provided that $\Delta d_\beta \geq \max\left(\varepsilon - \varepsilon_o, -\frac{\tilde{m}_s}{\tilde{m}_s}\right)$ if $\tilde{m}_s \neq 0$ or $\Delta d_\beta \geq \varepsilon - \varepsilon_o$ if $\tilde{m}_s > 0$ and $\tilde{m}_s \neq 0$.
- 4) $\beta < 0, 1 \geq |\beta| \geq \left| \frac{\varepsilon + \Delta d_\beta - \varepsilon}{\tilde{m}_s} \right|$
provided that $\varepsilon - \varepsilon_o \geq \Delta d_\beta \geq \max\left(-\varepsilon_o, -\frac{\tilde{m}_s}{\tilde{m}_s}\right)$ is $\tilde{m}_s \neq 0$ or $\varepsilon - \varepsilon_o \geq \Delta d_\beta \geq -\varepsilon_o$ if $\tilde{m}_s < 0$ and $\tilde{m}_s \neq 0$.



By using (6) with $\varepsilon = \varepsilon_o$, the following result stands,

Theorem 2: (Positive realness via β -FROH by increasing/decreasing direct input/output gains). If $g_o \in \{PR_d(\varepsilon_o)\}$ with $d_o = d_o + \varepsilon_o$ then $g_\beta \in \{PR_d(\varepsilon_o)\}$ if $d_\beta = d_o + \Delta d_\beta$ with $\Delta d_\beta \geq \max\left(-\varepsilon_o, -\frac{\beta \tilde{m}_i}{1 + \beta \tilde{m}_i}\right)$ if $\beta \in [0, 1]$ with $\beta \neq -\frac{1}{\tilde{m}_i}$; and $\Delta d_\beta \geq \max\left(-\varepsilon_o, \frac{|\beta| \tilde{m}_s}{1 + |\beta| \tilde{m}_s}\right)$ if $\beta \in [-1, 0]$ with $|\beta| \neq \frac{1}{\tilde{m}_s}$.

Remark 1: Note that the margin of positive realness, compared to that achieved with a ZOH, is improved with smaller positive values $0 < d_\beta < d_o$, since for positive realness of discrete transfer functions the relative degree is required to be zero, the direct input-output gain from Theorem 2 if $\beta < 0$ satisfying $|\beta| < \min\left(1, \frac{1}{|\tilde{m}_s|}\right)$ provided that $\min(\varepsilon_o, \tilde{m}_s) > 0$. This also holds if $1 \geq \beta > \frac{1}{|\tilde{m}_i|}$ with $\tilde{m}_i < 0, |\tilde{m}_i| > 1$ and $\tilde{m}_i < 0$, if $0 < \beta \leq \min\left(\frac{1}{|\tilde{m}_i|}, 1\right)$ if $|\tilde{m}_i| < 1$. If the usual constraint $\beta \in [-1, 1]$ is removed the several alternative solutions with $|\beta| > 1$ are useful for such a purpose of achieving positive realness for $0 < d_\beta < d_o$.

Example 1: Note that Theorems 1 and 2 are based on obtaining the worst case positive lower bounds of the $\operatorname{Re}(g_\beta(z))$ where each β -dependent right-hand-side term in (6) is minimized. However, it is possible to obtain refinements from positive lower bounds via numerical evaluation of the relation:

$$\begin{aligned} d(\beta) &> d_{min}(\beta) \\ &= - \left| \min_{z \in UC} g_\beta(z) \right| \end{aligned}$$

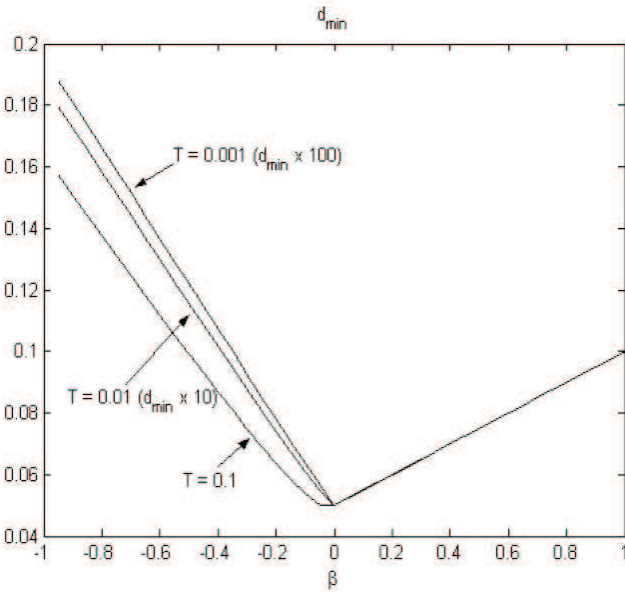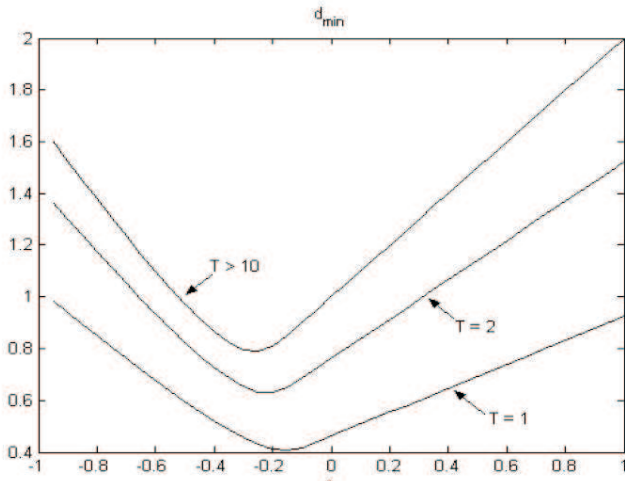

$$= - \left| \min_{z \in UC} Z [h_{\beta}(s)p(s)] \right|$$

REFERENCES

- [1] M. de la Sen, "A method for general design of positive real functions," *IEEE Trans. CASI*, vol. 45, no. 7, pp. 764–769, 1988.
- [2] —, "Relationships between positive realness of continuous transfer functions and their digital counterparts," *Elec. Lett.*, vol. 35, no. 16, pp. 1298–1299, 1999.
- [3] S. Liang and M. Ishitobi, "The stability properties of zeros of sampled models for time-delay systems in fractional order hold case," *Dyn. Cont. Dis. Ser. B*, vol. 11, no. 3, pp. 299–312, 2004.
- [4] M. de la Sen, "On the asymptotic hyperstability of dynamic systems with point delays," *IEEE Trans. CASI*, vol. 45, no. 11, pp. 1486–1488, 2003.
- [5] S. Liang, M. Ishitobi, and Q. Zhu, "Improvement of stability of zeros in discrete multivariable systems using fractional order hold," *IJC*, vol. 76, no. 17, pp. 1699–1711, 2003.

which is non-negative. Proceed in that way with $p(s) = \frac{1}{s+1} \in \{PR\}$. Figures below display the threshold $d_{min}(\beta)$ to be used in the continuous transfer function to achieve positive realness with a β -FROH for six distinct values of the sampling period ranging from 0.001 to 10 secs. Note that the smaller values of such a threshold are highly dependent on the sampling period and achieved for a range of negative values of β which improve the threshold $d_{min}(0)$ required for $\beta = 0$.

ACKNOWLEDGMENTS

The authors are grateful to the University of Basque Country and to the Spanish Ministry of Education by the financial support of this work through Grant 9/UPV-00106-15263/2003 and DPI2003-00164, respectively.